

## Four 4" LCD rack, composite

Ref: 040RK04VFA



### GENERAL SPECIFICATIONS

LCD type	4.0" TFT active matrix
Cabinet	19" rack 3ru height
Units in rack	4 LCD-TFT
Controls	Analogue front controls
Tilting angle	+50° / -50°

### DISPLAY

Brightness	250 cd/m2
Contrast ratio	150:1
Resolution (dots)	480(h) x 234(v)
Pixel	0.171(h) x 0.264(v) mm
Viewing angle	10°/30°(u/d), 45°/45°(l/r)
Viewing area	82.1(h) x 61.8(v) mm
Lamp life	10,000 hrs

### INPUTS & OUTPUTS - EACH DISPLAY

Data input	Not available
Video input	BNC video composite (2 input video A/B, 1 Vpp 75Ω EN50049, NFC92250) PAL/NTSC Auto Detect
Video output	BNC video composite (2 output)
Tally	Led - D-Sub 9 pins (contact close)

### ELECTRICAL



TFT power supply	12Vdc, 1.3 A
Rack power supply	100-240 Vac, 47-63 Hz, 3.3 A
Power consumption	16 W

### MECHANICAL

Rack dimensions	480 x 87 x 71.5 mm
Weight	3 Kg

### OTHER

Response time	Tr 25 ms, Tf 30 ms
Temperature	Operating +0°C ~ +60°C, Storage -25°C ~ +80°C

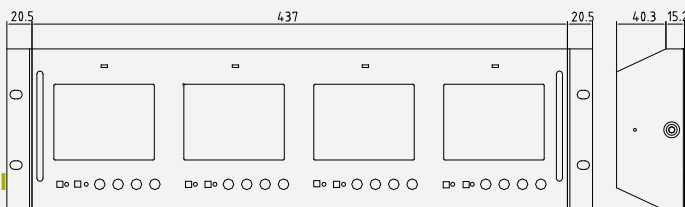

Specifications subject to change without previous notice. Albiral is a registered brand by ALBIRAL DISPLAY SOLUTIONS SL



ALBIRAL DISPLAY SOLUTIONS SL  
C/ Fàtima 25, 08512 Sant Hipòlit de Voltregà  
Barcelona - Spain  
Tel.: +34 93 850 23 76 / 23 83  
fax: +34 93 850 25 50  
web: www.albiral.com  
e-mail: marketing@albiral.com

ALBIRAL PRO, S.L.  
C/ Vázquez de Mella 23,  
28017 Madrid - Spain  
tel: +34 91 368 11 90  
fax: +34 91 368 11 97  
web: www.albiral.com  
e-mail: albiral@albiral.com

[www.albiral.com](http://www.albiral.com)