

## 15" LCD Rack, composite/data/SDI

Ref:150RK01MF/SDI



### GENERAL SPECIFICATIONS

LCD type	15" TFT Active Matrix
Cabinet	19" rack 7ru height
Units in rack	1 LCD-TFT
Controls	Digital front controls

### DISPLAY

Brightness	300 cd/m <sup>2</sup>
Contrast ratio	800:1
Resolution (dots)	XGA 1024(h) x 768(v)
Pixel	0.297(h) x 0.297(v) mm
Viewing angle	65°/75°(u/d), 70°/70°(l/r)
Viewing area	304.128(h) x 228.096(v) mm
Lamp life	50,000 hrs

### INPUTS & OUTPUTS

Data input	RGB SubD 15 (1 input), DVI (1 input)
Video input	BNC video composite (1 input 1V <sub>pp</sub> 75Ω) PAL/SECAM/NTSC Auto Detect / S-VIDEO Mini din 4 (1 input) / SDI BNC Serial input SMPTE 259M (1 input)
Video output	BNC SDI (1 output)

### ELECTRICAL

TFT power supply	12Vdc, 2 A
Rack power supply	100-240 Vac, 47-63 Hz, 12V 5.5 A
Power consumption	25 W

### MECHANICAL


Rack dimensions	480 x 310 x 60 mm
Weight	4.53Kg

### OTHER

Response time	Tr 2 ms, Tf 6 ms
Temperature	Operating +0°C ~ +40°C, Storage -20°C ~ +60°C

### OPTIONS

Serial interface RS232	
------------------------	--

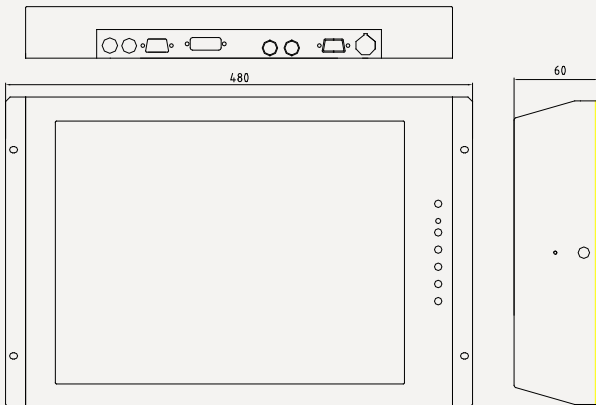

Specifications subject to change without previous notice. Albiral is a registered brand by ALBIRAL DISPLAY SOLUTIONS SL



ALBIRAL DISPLAY SOLUTIONS SL  
C/ Fátima 25,  
08512 Sant Hipòlit de Voltregà  
Barcelona - Spain  
Tel.: +34 93 850 23 76 / 23 83  
fax: +34 93 850 25 50  
web: www.albiral.com  
e-mail: marketing@albiral.com

ALBIRAL PRO, S.L.  
C/ Vázquez de Mella 23,  
28017 Madrid - Spain  
tel: +34 91 368 11 90  
fax: +34 91 368 11 97  
web: www.albiral.com  
e-mail: albiral@albiral.com

[www.albiral.com](http://www.albiral.com)