

15" LCD Rack, composite/data

Ref:150RK01MF



GENERAL SPECIFICATIONS

LCD type	15" TFT Active Matrix
Cabinet	19" rack 7ru height
Units in rack	1 LCD-TFT
Controls	Digital front controls

DISPLAY

Brightness	300 cd/m2
Contrast ratio	800:1
Resolution (dots)	1024(h) x 768(v)
Pixel	0.297(h) x 0.297(v) mm
Viewing angle	65°/75°(u/d), 70°/70°(l/r)
Viewing area	304.128(h) x 228.096(v) mm
Lamp life	50,000 hrs

INPUTS & OUTPUTS

Data input	RGB SubD 15 (1 input), DVI (1 input)
Video input	BNC video composite (1 input 1Vpp 75Ω) PAL/SECAM/NTSC Auto Detect / S-VIDEO Mini din 4 (1 input)

ELECTRICAL

External power supply	100-240 Vac 47-63 Hz 12V 5.5 A
Power consumption	20 W

MECHANICAL


Rack dimensions	480 x 310 x 60 mm
Weight	4.53Kg

OTHER

Response time	Tr 2 ms, Tf 6 ms
Temperature	Operating +0°C ~ +40°C, Storage -20°C ~ +60°C

OPTIONS

Serial interface RS232	
------------------------	--

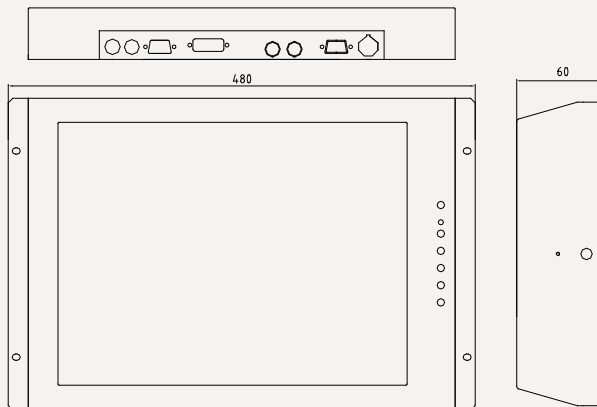

Specifications subject to change without previous notice. Albiral is a registered brand by ALBIRAL DISPLAY SOLUTIONS SL



ALBIRAL DISPLAY SOLUTIONS SL
 C/ Fátima 25,
 08512 Sant Hipòlit de Voltregà
 Barcelona - Spain
 Tel.: +34 93 850 23 76 / 23 83
 fax: +34 93 850 25 50
 web: www.albiral.com
 e-mail: marketing@albiral.com

ALBIRAL PRO, S.L.
 C/ Vázquez de Mella 23,
 28017 Madrid - Spain
 tel: +34 91 368 11 90
 fax: +34 91 368 11 97
 web: www.albiral.com
 e-mail: albiral@albiral.com

www.albiral.com